


Overall Solution for Your Shop

We Supply Everything

- **Wheel Alignment**
- **Tyre Changer**
- **Wheel Balancer**
- **Automotive Lift**
- **Motorcycle Lift**
- **Tyre Service Equipment**




JIAXING WINSEN IMP.&EXP. CO.,LTD

E-mail: sales1@wsautotools.com; sales10@wsautotools.com

Website: www.wsautotools.com



Portable Wheel Aligner

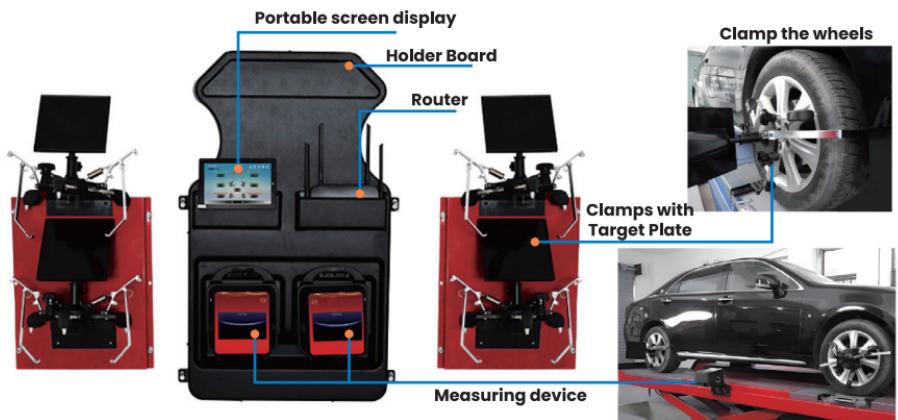

Accessories:



Steering Wheel Holder & Brake Pedal Depressor

Turn Plates & Rubber Pads

Adapter for the Car Lift

Wheel Stoppers

Safety Ropes



5D Wheel Aligner
All vehicle models:
5 cameras,
4 jaw clamps



Wheel Aligner for New Energy Cars
All NEV models:
5 cameras,
4 jaw clamps



Truck Wheel Aligner
All truck models
Using 6 sensors for measurement



3D Wheel Aligner
Beam height Manual adjustment



Auto-Tracking 3D Wheel Aligner
Auto-Tracking system



3D Wheel Aligner with Dual-Screen
Auto Tracking system
Dual-screen display



Magnetic Camber Castor Kingpin Gauge




Turn Plate for Wheel Alignment



Toe-in Gauge



Fully-Automatic Tyre Changer

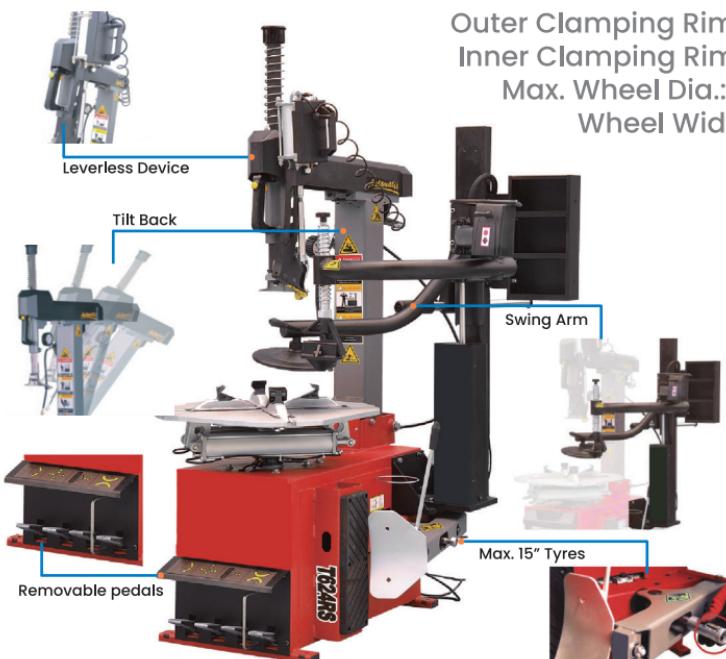

Outer Clamping Rim : 11"-20"
Inner Clamping Rim: 12"-24"

Max. Wheel Dia.: 960mm
Wheel Width: 3"-12"



Semi-Automatic Tyre Changer

Outer Clamping Rim: 11"-20"
Inner Clamping Rim: 12"-24"
Max. Wheel Dia.: 960mm
Wheel Width: 3"-12"



Semi-Automatic Tyre Changer with Swing Arm

Outer Clamping Rim: 11"-22"
Inner Clamping Rim: 14"-26"
Max. Wheel Dia.: 1250mm
Wheel Width: 3"-15"



Fully-Automatic Tyre Changer with Double Arms

Outer Clamping Rim: 13"-26"
Inner Clamping Rim: 15"-28"
Max. Wheel Dia.: 1100mm
Wheel Width: 3"-15"



Fully-Automatic Tyre Changer

Leverless,
Equipped with Tyre Lift
Clamping Rim: 14"-30"
Max. Wheel Dia.: 1100mm
Wheel Width: 3"-15"



Fully-Automatic Tyre Changer

Leverless,
Equipped with Tyre Lift
Clamping Rim: 13"-30"
Max. Wheel Dia.: 1200mm
Wheel Width: 3"-15"



Pneumatic Tyre Lift for Tyre Changer



Motorcycle Clamp

Truck Tyre Changer

Clamping Rim: 13"-26"

Max. Tyre Dia.: 1400mm

Max. Wheel Width: 600mm

Max. Wheel Weight: 1000kg



Truck Tyre Changer

Clamping Rim: 14"-42"

Max. Wheel Dia.: 2300mm

Max. Wheel Width: 1050mm

Max. Wheel Weight: 1600kg



Truck Tyre Changer

Clamping Rim: 14"-56"

Max. Wheel Dia.: 2200mm

Max. Wheel Width: 1100mm

Max. Wheel Weight: 1500kg



Mobile Car & Truck Tyre Changer

Clamping Rim: 13"-26"

Max. Wheel Dia.: 1300mm

Max. Wheel Width: 600mm

Max. Wheel Weight: 700kg



Portable Pneumatic Truck Tyre Changer

Tyre Use

Rim Dia.: 17", 19", 22.5"

Optional Electric operated



Manual Motorcycle & Car Tyre Changer

Outer Clamping Rim: 10"-27"

Inner Clamping Rim: 12"-29"

Max. Wheel Dia.: 920mm

Wheel Width: 300mm



Truck Hydraulic Bead Breaker with Foot Pump

Usable Oil Volume: 2.3L

Air Pressure: 70MPa

Air Hydraulic Pump + Combi Bead Breaker + 2M Oil Hose



Fully-Automatic Wheel Balancer

Clamping Rim: 10"-32"

Wheel Width: 1.5"-25"

Max. Wheel Weight: 80kg



Car Wheel Balancer
Rim Dia.: 10"-24"
Wheel Width: 1.5"-20"
Max. Wheel Weight: 65kg



Car Wheel Balancer
With touch screen
Rim Dia.: 10"-30"
Wheel Width: 1.5"-20"
Max. Wheel Weight: 80kg



Car Wheel Balancer
With touch screen
Automatically data input for value A, D and L
Rim Dia.: 1"-28"
Wheel Width: 1.5"-20"
Max. Wheel Weight: 70kg



Truck Wheel Balancer
Rim Dia.: 10"-24"
Wheel Width: 1.5"-20"
Max. Wheel Weight: 200kg



Truck Wheel Balancer
Rim Dia.: 1"-28"
Wheel Width: 2"-20"
Max. Wheel Weight: 200kg



Pneumatic Tyre Lift for Wheel Balancer



Automatic Positioning




Low-Profile Scissor Lift with Secondary Lift Tables

Lift Capacity: 5500kg

Secondary Lift Capacity: 2200kg

Max. Lifting Height: 2030mm

Min. Lifting Height: 185mm

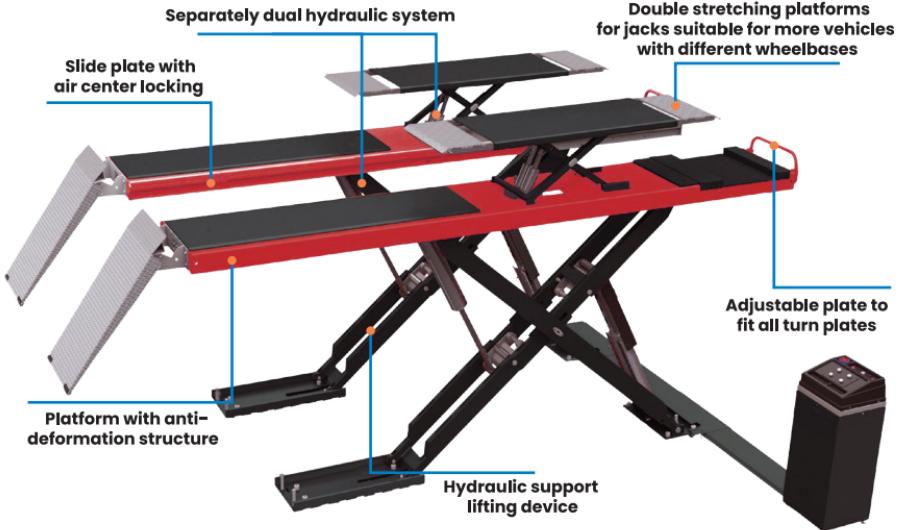

Mini Two-Post Lift
Capacity: 3T



Base-Plate Two-Post Lift
Capacity: 4T/5T



Clear-Floor Two-Post Lift
Capacity: 4T/5T



Four Post Lift
Capacity: 4T/5T



Four Post Lift for Wheel Alignment
With a secondary lift jack
Capacity: 4T/5T



SINGLE POST LIFT
Mobile post or fixed post
Capacity: 2.5T



Underground Scissor Lift
With Secondary Lift Tables
Capacity: 4T/5T



Ultra-Thin Scissor Lift
Capacity: 3T/3.5T



Mobile Mid-Rise Scissor Lift
Capacity: 3T

Automotive Lift

WSAT



Portable Mid-Rise Scissor Lift
Capacity: 2.7T/3T



Mid-Rise Scissor Lift
Capacity: 3T
With Airbags



Portable Rapid Lift
Capacity: 2.5T/3.5T
DC12V or AC110V/220V
power supply



EV Battery Pneumatic Lift
Capacity: 1.5T



EV Battery Lift with Pneumatic Pump
Capacity: 1.2T



EV Battery Lift
Capacity: 1.2T

Heavy-Duty Column Lift



Heavy Duty Wireless Column Lift
Capacity: 5.5T/7.5T



Heavy Duty Cabled Column Lift
Capacity: 5.5T/7.5T



Heavy Duty Column Lift
Capacity: 25T

Automotive Parking Lift



Electric-Hydraulic Four Post Parking Lift
Capacity: 4T



Electric-Hydraulic Four Post Parking Lift
Capacity: 4.2T



Electric-Hydraulic Four Post Parking Lift
Capacity: 2.7T/3.2T

Motorcycle Lift

WSAT



Motorcycle Hydraulic Lift Table

Capacity: 800lbs / 1000lbs
Max. Lift Height: 780mm



Motorcycle Hydraulic Lift Table

Capacity: 800lbs / 1000lbs
Max. Lift Height: 680mm/780mm



Motorcycle Electric Lift Table

Capacity: 1000lbs / 1500lbs
Max. Lift Height: 830mm



Motorcycle Lift

Capacity: 400kg
Max. Lift Height: 1080mm



Motorcycle Lift

Capacity: 1100lbs
Max. Lift Height: 470mm



ATV & Motorcycle Electro-Hydraulic Lift Table

Capacity: 600kg
Max. Lift Height: 905mm



ATV & Motorcycle Hydraulic Lift

Capacity: 1500lbs
Max. Lifting Height: 380mm



Motorcycle Hydraulic Lift

Capacity: 300lbs
Max. Lifting Height: 870mm



Motorcycle Hydraulic Scissor Lift

Capacity: 1100lbs
Max. Lifting Height: 400mm



Motorcycle Front Headstock Paddock Stand

Capacity: 550lbs
With Pins. It can be used in a wide range of vehicles from small to large.



Motorcycle Wheel Chock with Wheels

Suitable: 16"-21" Wheels



Motorcycle Manual Tyre Changer

Clamping Rim: 16"-21" Tyre



Tyre Lift
Pneumatic or electric operation
Weight Capacity: 65kg
Lift Height: 0~1200mm



Tyre Lift
Electric operation
Weight Capacity: 80kg
Lift Height: 135~1200mm



Tyre Lift
Weight Capacity: 50kg
Lift Height: 93-1078mm



Truck Wheel Removal Trolley
Capacity: 1200kg
Max. Lifting Height: 750mm
Max. Wheel Width: 500mm



Wheel Removal Trolley
Capacity: 220kg
Tyre Width: 101mm



Extended Wheel Removal Labor Saving Shovel



Pneumatic Tyre Spreader with Working Light
Max. Tyre Diameter: 18R/22.5"
Working Pressure: 114-171PSI



Pneumatic Tyre Spreader with Stand
Air Pressure: 85-142psi
Tyre Diameter: 145-275mm



Rotatable Spot Vulcanizing Machine
90° Rotatable
Equipped with timer



Spot Vulcanizing Machine
Equipped with timer, automatic temperature control
Economic type



Truck Tyre Mount Demount Tool
Tyre Size: 17.5"-24.5"



Portable Bead Seater
Tank Capacity: 9L/12L
Material: Steel or Aluminum

Overall Solution for Your Shop



JIAXING WINSEN IMP.&EXP. CO., LTD

Address: 4-1306 Taisheng international plaza
3-6 Economic and Technological Development
District, Jiaxing, Zhejiang, China

E-mail: sales1@wsautotools.com
sales10@wsautotools.com

WhatsApp: +86 137 3643 3978

Website: www.wsautotools.com



WhatsApp



Scan to Website